

**7th USA /EUROPE AIR TRAFFIC MANAGEMENT R&D SEMINAR
BARCELONA, 2007**

**TRENDS IN GLOBAL NOISE AND EMISSIONS FROM
COMMERCIAL AVIATION FOR 2000 THROUGH 2025**

*Gregg Fleming, Andrew Malwitz, Sathya Balasubramanian, Chris Roof, DOT Volpe
Center, Cambridge, MA*

*Fabio Grandi, Brian Kim, Scott Usdrowski, Wyle Laboratories, Inc., Arlington, VA
Ted Elliff, EUROCONTROL*

Christopher Eyers, QinetiQ

David Lee, Manchester Metropolitan University

Abstract

In 1983, the International Civil Aviation Organization (ICAO) established the Committee on Aviation and Environmental Protection (CAEP) to assess aviation-related noise and emissions issues. CAEP has established three environmental goals: limit or reduce the number of people *impacted* by noise; limit or reduce the *impact* of aviation emissions on local air quality (LAQ); and limit or reduce the *impact* of aviation greenhouse gas (GHG) emissions on the global climate.

With CAEP goals in mind, this paper presents trends in aviation noise impacts, expressed in terms of population exposed to various day-night average sound levels (DNL). The paper also presents trends in total aviation-related fuel burn and emissions. In both cases, aggregated global data are presented, as well as data on a regional level for baseline years of 2000 through 2005, as well as for the future years of 2010, 2015, 2020 and 2025.

As can be seen in this trends assessment, the input databases and computational methodologies used are migrating in the direction of harmonizing data and methods. It is envisioned that these types of assessments have broad applicability and can be used to support a variety of national and international requirements, including policy establishment.

Introduction

In 1983, the International Civil Aviation Organization (ICAO) established the Committee on Aviation and Environmental Protection (CAEP) to assess aviation-related noise and emissions issues. CAEP meets on a triennial basis, with the 7th and latest meeting (CAEP/7) scheduled for February 2007. In support of their 7th Meeting, CAEP has established three environmental goals: limit or reduce the number of people impacted by noise; limit or reduce the impact of aviation emissions on local air quality (LAQ); and limit or reduce the impact of aviation greenhouse gas (GHG) emissions on the global climate.

For the purposes of this paper, LAQ is defined as the region in the atmosphere from 0 to 3000 feet above ground level (AGL). LAQ is a concern for the population in the vicinity of an airport. Increased emissions may lead to adverse health effects such as respiratory issues and damage to lung tissue, damage to waterways and vegetation, as well as decreased visibility [1].

GHG is defined as the region typically anywhere above LAQ (greater than 3000 ft AGL). The effects of GHG are related to climate change, in that an increase in GHG may lead to an increase in the overall global temperature [1], but the degree of the effects are much more uncertain compared with the effects of LAQ emissions.

The commonly accepted metric for measuring noise impact has been the number of people within a particular sound level contour, usually expressed in terms of day-night average sound level (DNL).

Unlike for noise, there is no generally accepted metrics for reporting the impact of LAQ and GHG. Additional work is needed to establish a metric for LAQ/GHG.

This paper presents trends in aviation-related noise impacts, expressed in terms of population exposed to various DNL values. In the absence of an accepted metric for determining LAQ/GHG impacts, this paper presents trends in total aviation fuel burn and emissions. In both cases, aggregated global data are presented, as well as data on a regional level for baseline years of 2000 through 2005, as well as for future years of 2010, 2015, 2020 and 2025.

Current and Future Noise Analyses

The Federal Aviation Administration's (FAA) Aviation Environmental Design Tool, Model for Assessing Global Emissions of Noise from Transport Aircraft (AEDT/MAGENTA) was used to assess global trends in current and future aircraft noise exposure. Various member countries of ICAO/CAEP led the development of AEDT/MAGENTA. The U.S. and U.K. led design and development, and the U.S. provided direct funding support.

AEDT/MAGENTA computes detailed noise exposure for approximately 200 of the world's busiest airports, and provides lower fidelity noise computations for approximately 2000 additional airports. For each airport, a noise contour is combined with population data to compute the number of people within a particular sound level contour, usually expressed in terms of DNL.

The current version of AEDT/MAGENTA is compliant with the recently-approved ECAC/CEAC Doc 29, 3rd Edition, *Report on Standard Method of Computing Noise Contours around Civil Airports*[2]. The most substantial advance in Doc 29 is the adoption of an updated version for computing the lateral attenuation of airplane noise, as prescribed in the Society of Automotive Engineers' (SAE) Aerospace Information Report (AIR) 5662, *Method for Predicting Lateral*

Attenuation of Airplane Noise [3]. SAE has shown the algorithms in this AIR are more accurate than those in its predecessor document. They have also shown that the new standard will result in contours that are generally 10 to 20 % larger, than those computed with the older standard, SAE AIR 1751, *Prediction Method for Lateral Attenuation of Airplane Noise During Takeoff and Landing* [4].

For the noise trends assessment, the 2000 through 2004 results were originally computed based on the older SAE AIR 1751 standard, but were adjusted for consistency with the newer SAE AIR 5662 and DOC 29 standards. The 2005 noise results were computed and displayed in two ways: with a Doc 29 compliant AEDT/MAGENTA and with a version of the model based on the older lateral attenuation algorithms of SAE AIR 1751. This way, the effect of migrating to the new Doc 29-compliant standard could be easily quantified.

For the 2005 Doc 29 – compliant AEDT/MAGENTA runs, results were computed both with and without Commonwealth of Independent State (CIS) airports, which include four from Russia and two from other CIS states. Due primarily to data availability issues, previous global noise exposure trends assessments excluded CIS airports. Their inclusion in the current trends assessment allows for a more consistent comparison with the LAQ/GHG results, since emissions data have traditionally been reported for all global airports. This consistency is a logical evolution in leading to noise/emissions interdependency studies, which reflects the current direction of aviation-related environmental analyses (e.g., ICAO/CAEP analyses, and analyses in support of the Joint Programs Development Office in the U.S. (<http://www.jpdo.aero/>))

The fleet and operations module (FOM) within AEDT, which is documented extensively in another paper to this conference, *The Fleet and Operations Module (FOM) within the FAA's Aviation Environmental Design Tool (AEDT)* [5], was used to generate future operations data for the years 2010, 2015, 2020, and 2025. The FOM assumed unconstrained growth, such that infrastructure enhancements would keep pace with industry growth.

The FOM also needed to make an estimation for the aircraft being flown (known as the fleet) in the future years of the study. The database used for populating the future aircraft fleet is known as the Best Practices (BP) database, and it is developed with substantial input from the aviation industry. The BP database makes no estimates of noise and emissions for future technology aircraft. It only includes aircraft already designed and planned to be in service.

The process of replacing retired aircraft in the future fleet with aircraft in the BP database is discussed in the FOM paper. It is consistent for both noise and emissions, with the only difference being a slightly different pool of aircraft being used to replace retired aircraft. Work is currently underway to ensure that the replacement database is consistent for both noise and emissions analyses, and that the database will actually reflect what might be achieved in terms of future advances in noise and emissions technologies.

The AEDT/MAGENTA results are presented in terms of population within the 55, 60 and 65 dB DNL contours. Geographically-based, regional totals are presented in Table 1, and also graphically for the 65 dB DNL contour in Figure 1. This chart represents all operations from the specific region, whether within a region or between regions. It also clearly illustrates the sharp decrease in population exposed from 2001 to 2002 due to the events of September 11, 2001, the SARS epidemic, and the accompanying economic downturn.

As discussed above, the 2005 noise results were computed in two ways, first using the Doc 29-compliant AEDT/MAGENTA and then using the older version of AEDT/MAGENTA. In Table 1, these two scenarios are labeled as 2005(A) and 2005(B)(Doc 29 W/CIS). In Figure 1, results for years 2000 through 2004 were adjusted to account for the effects of migrating to a DOC 29-compliant MAGENTA in 2005.

Table 2 summarizes the differences in computed noise when using the Doc 29-compliant version of the model, as compared with the older version, including the impact of including CIS airports. As can be seen, the primary contributor to the change in 2005 results

is the use of a Doc 29-compliant AEDT/MAGENTA, which includes the recently-adopted and more accurate lateral attenuation algorithms of SAE AIR 5662 [3], as previously discussed.

LAQ and GHG Emissions

For the LAQ and GHG emissions trends, the results from four models were considered: (1) U.S. FAA's AEDT System for assessing Aviation's Global Emissions (AEDT/SAGE) [6]; (2) EUROCONTROL's Advanced Emissions Model (AEM) [7]; (3) U.K. Civil Aviation Authority's AERO2K [8]; and (4) U.K.'s FAST Model [9]. A primary driver for including the results from four models is that, unlike with noise, there are currently no internationally accepted standards for computing aircraft emissions.

A summary of the years, which are identical to those used for noise, and models used for the LAQ/GHG trends assessment is presented in Table 3.

Since the GHG models compute emissions and fuel burn from aircraft operating gate-to-gate, they provide LAQ data in addition to data for the en-route portion of flight (GHG). Consequently, for the purposes of the trends assessment, the results from the four models are presented in Table 4 by flight regime, so as to preserve the output of interest for LAQ (the terminal area under 3,000 ft.) and GHG (en-route over 3,000 feet).

Table 4 presents the summary fuel burn and emissions (CO, HC, NO_x, and CO₂) results for all LAQ/GHG models for all analysis years. Figure 2 presents the base-year (2000 through 2005) actual fuel burn data from each model, as well as the four-model, average fuel burn and 95% confidence interval (CI) for each future year. Figures 3 and 4 present the base-year (2000 through 2005) actual NO_x data, as well as the four-model, average NO_x and 95% CI for each future year, for the LAQ and GHG cases, respectively.

Observations

In the process of evaluating the environmental goals and conducting this trends assessment, several potential methodological enhancements were identified. These should be considered in any similar trends assessment.

First, enhancements and harmonization of the approaches used for computing emissions for both GHG and LAQ should be researched. The dispersion of pollutants should be considered, as well as the inclusion of emissions contributions from the ground-level support crew. Also, particulate matter was not observed due to insufficient scientific consensus as to proper modeling techniques. If the science is sufficiently mature, then particulate matter should be considered.

Enhancements can also be made to the way future years are modeled. As mentioned previously, there were no assumptions of improving aircraft technology. In addition, the future operational data was computed assuming unconstrained growth. Updated operational procedures that will reduce noise and emissions could also be included, as well as improved land use planning initiatives (e.g., future encroachment trends). Finally, an appropriate metric for fuel efficiency must be considered for assessing trends in fuel burn and emissions against a particular goal.

The data presented here may be underestimating what aviation might expect to be able to achieve through continued improvements in technology, operation, and air traffic management. Therefore, proper consideration of the above recommendations will reduce the uncertainty and improve the policy relevance of the results for future trends assessments, as well as policy related assessments.

Note, however, these recommendations will also result in a discontinuity in process compared with previous analyses of noise and emissions. Care will need to be taken in conducting future trends assessments to ensure that the effects of this process discontinuity are adequately quantified. The process undertaken herein to quantify the effects of migrating to a DOC 29-compliant AEDT/MAGENTA may serve as a valuable template.

Summary

The de facto standard for conducting global assessment of aircraft noise trends is AEDT-MAGENTA. For the assessment of global emissions trends from aircraft, there are several models that are in use throughout the U.S. and Europe. In most cases, the emissions tools utilize common input data and

computational methodologies. There is work currently underway in ICAO/CAEP to advance this harmonization process not only within the emissions methodologies, but across noise and emissions. There is a growing desire by environmental policymakers to not only study the effects a particular policy might have on noise or on emissions, but to be able to consider the interdependencies between these two important environmental variables.

As can be seen in this study, the input databases and computational methodologies are migrating in the direction of harmonizing data and methods. However, there is still a lot of work to accomplish in this effort. Similarly, improvements must be made to the overall approach to conducting noise and emissions trends assessments, particularly with regard to fleet forecasting. Finally, it is envisioned that the methods and input data used for these types of trends assessments have broad applicability and can be used to support a variety of national and international requirements.

Acknowledgements

Joseph DiPardo, Maryalice Locke, Ralph Iovinelli, FAA, Washington, D.C.

Ted Thrasher, Alex Nguyen, Cliff Hall, CSSI, Inc., Washington D.C.

Eric Dinges, ATAC Corporation, Sunnyvale, CA

References

- [1] Environmental Protection Agency (EPA), "Air and Radiation: Basic Information," EPA Office of Air and Radiation, <http://www.epa.gov/air/index.html>, 2006.
- [2] European Civil Aviation Conference, "ECAC.CEAC Doc 29: Report on Standard Method of Computing Noise Contours around Civil Airports, Volume 2: Technical Guide," ECAC.CEAC, 3rd Edition, July 2005.
- [3] SAE Aerospace Information Report, "AIR 5662: Method for Predicting Lateral Attenuation of Airplane Noise", SAE International, 2006.
- [4] SAE Aerospace Information Report, "AIR 1751: Prediction Method for Lateral Attenuation of Airplane Noise During Takeoff and Landing", Society of Automotive Engineers Inc., 1981.
- [5] Grandi, Fabio, "The Fleet and Operations Module (FOM) within the FAA's Aviation Environmental Design Tool (AEDT)", Air

Traffic Management Research and Development, 2007.

[6] Federal Aviation Administration (FAA), “Aviation Environmental Models”, FAA Office of Environment and Energy, http://www.faa.gov/about/office_org/headquarters_offices/aep/models/, 2006.

[7] Jelinek, Frank. “European GAES-INVENT Emission Inventory”, EUROCONTROL, http://www.eurocontrol.int/eec/public/standard_page/SEE_2004_report_15.html, August, 2005.

[8] Centre for Air Transport and the Environment. “AERO2K”, Manchester Metropolitan University, <http://www.cate.mmu.ac.uk/aero2k.asp>, 2006.

[9] Lee, David S, Owen, Bethan. “Study on the Allocation of Emissions from International Aviation to the U.K. Inventory”, DEFRA Global Atmosphere Division, http://www.cate.mmu.ac.uk/project_view.asp?chg=projects&chg2=2&id=2, 2006.

Table 1: AEDT/MAGENTA Results for 55, 60 and 65 dB DNL Population Above Contour Level

55 dB

	2000	2001	2002	2003	2004	2005(A) (CAEP / 6)	2005(B) (DOC29 W/CIS)	2010	2015	2020	2025
Africa	345274	346371	432600	416500	408681	404635	339269	308833	258711	235939	240619
Asia	7587786	7645920	6286438	5972194	6098674	6190149	7682065	8842866	9853990	10158369	10471078
Australia	86935	90061	117292	115760	118132	120432	166388	193162	216910	230713	242984
Eastern Europe	253604	255457	231480	228142	228839	229476	965773	1013975	1026514	1058578	1086811
Middle East	2452210	2470682	1461794	1395412	1405478	1425305	2684665	2888199	3142247	3521081	3981975
North America	10604625	10499088	6864415	6471512	6427769	6396417	6681386	7042005	7738542	8292456	9095908
South America	1229374	1210471	1154726	1098394	1089359	1076901	1039549	1111125	1136068	1180589	1220806
Western Europe	1432970	1438051	1274784	1267275	1279866	1292375	1802067	2282325	2875581	3461975	3979326
Total	23992776	23956101	17823529	16965188	17056798	17135691	21361161	23682489	26248563	28139699	30319506

60 dB

Africa	198579	199421	234863	226141	220675	219429	104508	89518	67448	58721	60780
Asia	2781281	2792792	1927485	1801359	1829804	1860149	2379682	2822976	3380451	3546543	3743031
Australia	27780	29455	44883	43803	44725	45619	58143	71856	85323	91668	97618
Eastern Europe	159676	160458	147523	145383	145636	145896	437317	464085	474472	483513	490875
Middle East	587277	592119	321184	309653	313785	318036	740712	806883	888768	1018441	1177921
North America	3730954	3692928	2524886	2367806	2345418	2334667	2491549	2560744	2812067	2985171	3301683
South America	527943	518075	473783	443849	439598	433803	394540	423169	431253	449388	465380
Western Europe	455588	459007	421986	418290	422864	427797	601859	777263	989390	1204911	1411475
Total	8469077	8444256	6096592	5756284	5762504	5785394	7208309	8016493	9129170	9838354	10748762

65 dB

Africa	61030	61969	76658	70608	67180	66433	21004	18601	14458	12769	12740
Asia	819958	822775	619680	593786	601511	609520	715427	864369	994774	1048162	1113596
Australia	5185	5649	13756	13324	13661	13997	15106	20017	25761	28299	30751
Eastern Europe	63335	64808	66872	65382	65932	66506	176537	194870	205129	215464	224240
Middle East	137977	138741	70740	68787	69718	70636	243795	258929	273665	301597	336819
North America	1303739	1294429	865205	798740	790488	785664	794503	798562	868745	931105	1053662
South America	206534	202335	176799	163170	161320	158714	137139	148223	151210	157270	163238
Western Europe	119988	121617	129018	127932	129495	131070	165396	221938	293235	370512	446849
Total	2717745	2712322	2018727	1901729	1899305	1902538	2268907	2525509	2826977	3065178	3381894


Table 2: Change in Population, Sensitivity Summary, Doc29 Compliance Contribution

	% Change in Population Relative to 2005(A) with CAEP/6 Noise Engine		
DNL (dB)	2005(A)	2005(B) (DOC29 and CIS TOTAL)	2005(B) (DOC29 only TOTAL)
55	Ref	25%	19%
60	Ref	25%	18%
65	Ref	19%	11%

Table 3: Summary of Years and Models for Emissions

Year of Study	Study Type	Model Notes for Quantifying Fuelburn, Emissions and Fuel Burn Efficiency
2000	Baseline	AEDT / SAGE FAST
2001	Baseline	AEDT / SAGE
2002	Baseline	AEDT / SAGE AEM AERO2K
2003	Baseline	AEDT / SAGE AEM
2004	Baseline	AEDT / SAGE AEM
2005	Baseline	AEDT / SAGE AEM FAST
2010, 2015, 2020, 2025	Future	AEDT/SAGE, AERO2K and AEM using operational deltas generated from the AEDT fleet and operations Module (FOM); FAST method using 2003 predictions and seat-based category aircraft.

Figure 1: Summary of AEDT/MAGENTA Results for 65 dB DNL

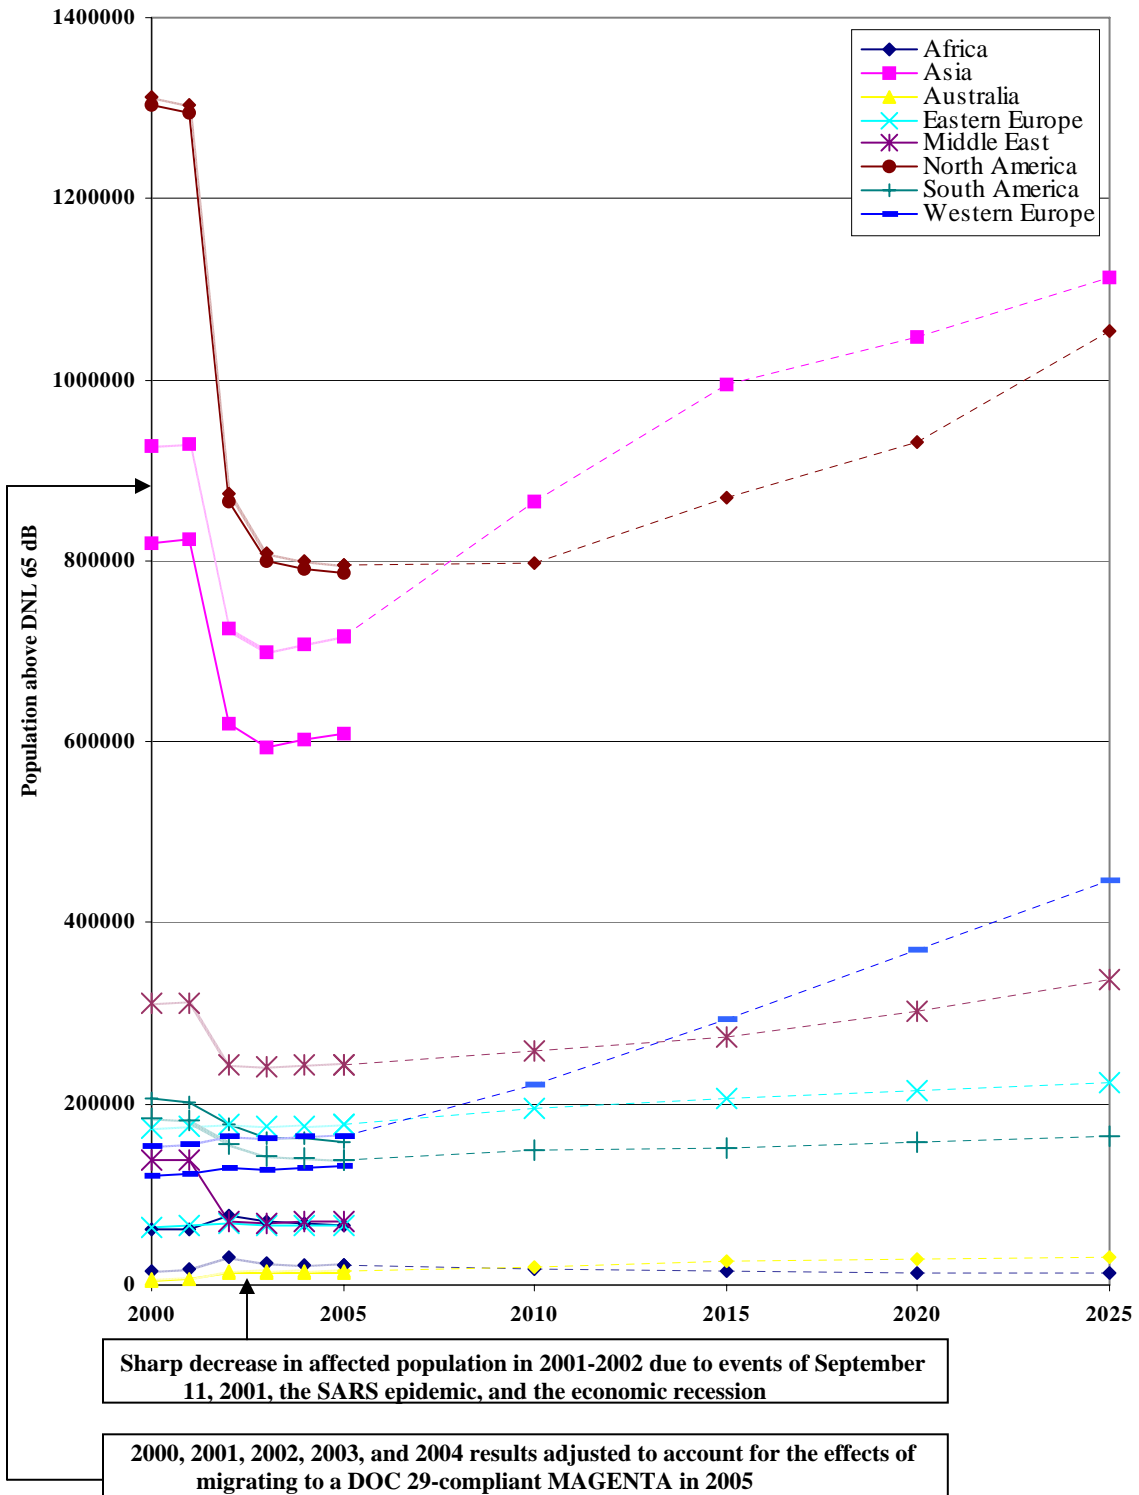

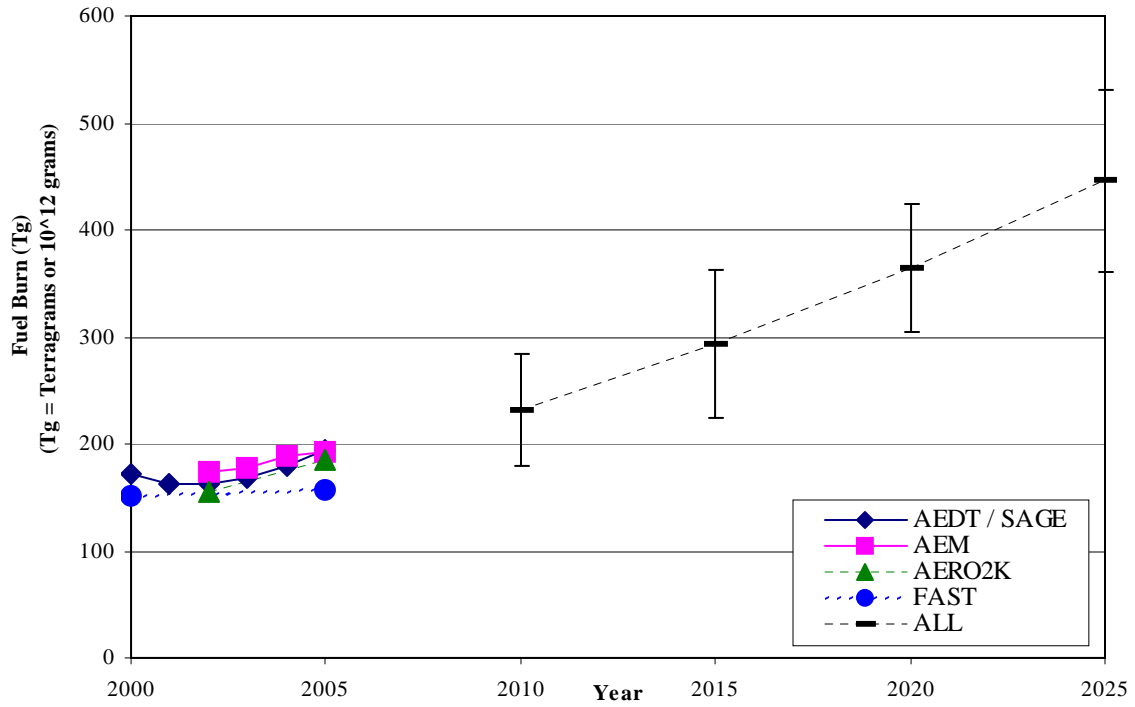


Figure 2: Summary of Total Fuel Burn. Represents four individual model results for actual fuel burn data, and four-model-average fuel burn with 95% confidence intervals for each future year.

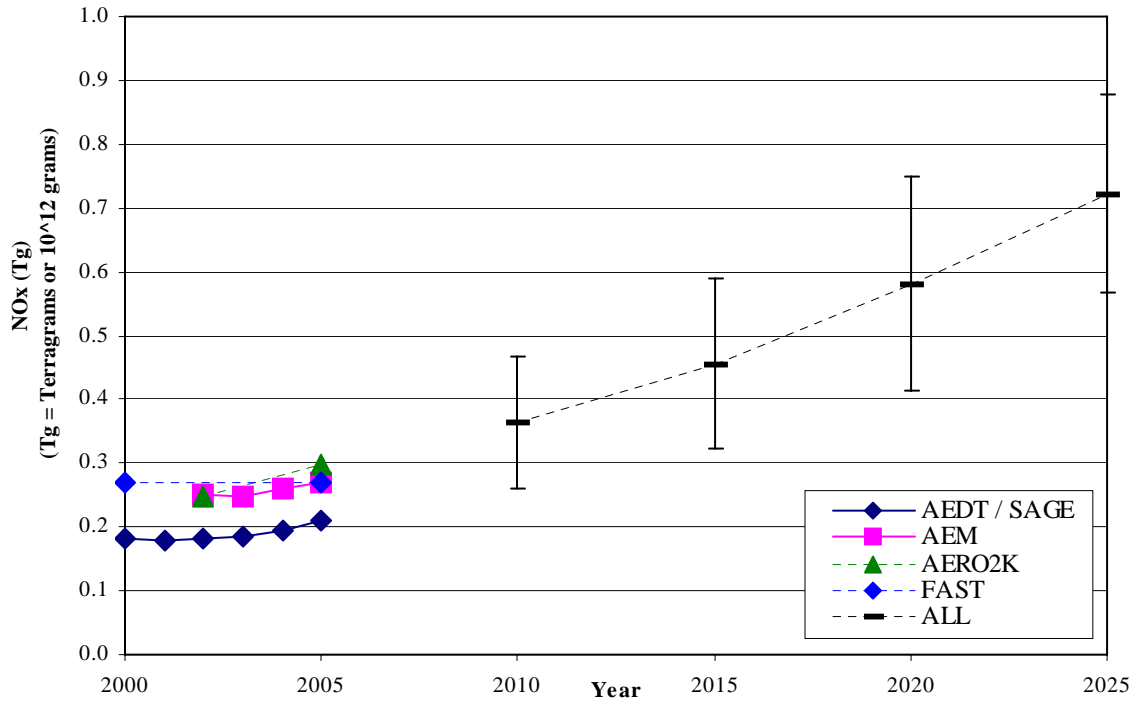


Figure 3: Summary of NOx < 3000 Ft (Local Air Quality). Represents four individual model results for actual fuel burn data, and four-model-average fuel burn with 95% confidence intervals for each future year.

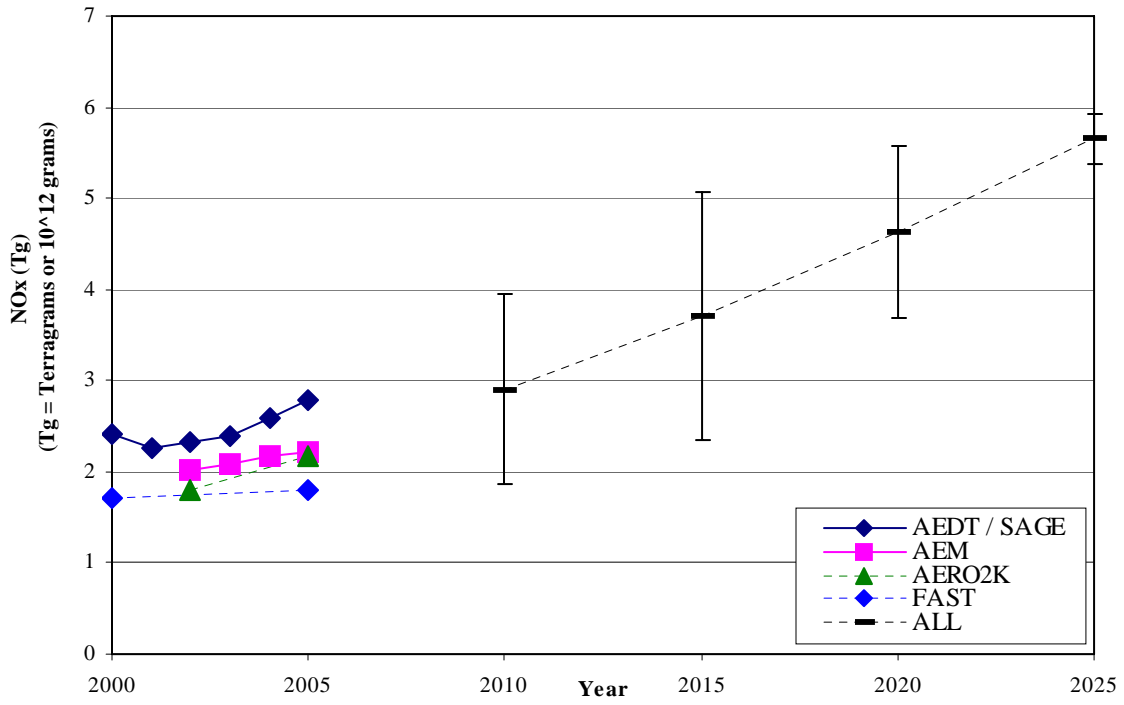


Figure 4: Summary of NOx > 3000 Ft (Green House Gases). Represents four individual model results for actual fuel burn data, and four-model-average fuel burn with 95% confidence intervals for each future year.